



K A R M A N

PROVENZA

K A R M A N



AVORIO CEMENTO



SABBIA CEMENTO



CENERE CEMENTO



ANTRACITE CEMENTO

PROVENZA




Cenere Cemento
Naturale R10 Rett. 60x120 - 23^{5/8}x47^{1/4}"

K A R M A N

COLORI E FORMATI

Colours and Sizes | Couleurs et Formats | Farben und Formate | Colores y Tamaños | Цвета и Форматы


Avorio Cemento

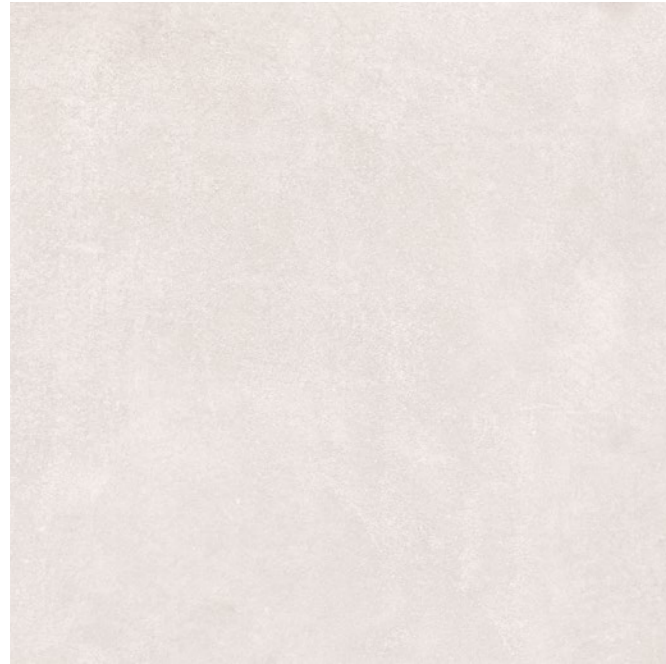

Sabbia Cemento



Cenere Cemento

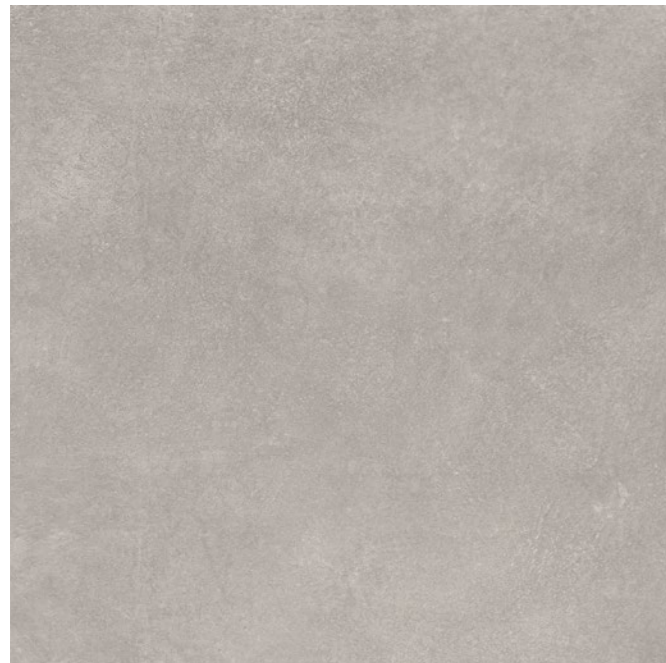

Antracite Cemento





Si consiglia la posa con fuga 2 mm. - Laying with a 2 mm-joint is recommended. - Pose recommandée avec joints de 2 mm.
Es wird eine Fugenbreite von 2 mm empfohlen. - Se recomienda la colocación con juntas de 2 mm. - Рекомендуется укладка с швом 2 мм.

K A R M A N

COLORI E FORMATI

Colours and Sizes | Couleurs et Formats | Farben und Formate | Colores y Tamaños | Цвета и Форматы


 9,5 mm.



Cemento Naturale R10 Rett.

60x120 - 23^{5/8}"x47^{1/4}"

EDA8 Avorio ● T31
EDA9 Sabbia ● T31
EDAA Cenere ● T31
EDAC Antracite ● T31



Cemento Naturale R10 Rett.

90x90 - 35^{7/16}"x35^{7/16}"


ED8X Avorio ● T31
ED8Z Cenere ● T31



Cemento Naturale R10 Rett.

60x60 - 23^{5/8}"x23^{5/8}"

ED9J Avorio ● T17
ED9K Sabbia ● T17
ED9L Cenere ● T17
ED9M Antracite ● T17



Cemento Naturale R10 Rett.

30x60 - 11^{13/16}"x23^{5/8}"

ED9W Avorio ● T14
ED9X Sabbia ● T14
ED9Y Cenere ● T14
ED9Z Antracite ● T14

Verificare l'abbinamento dei toni tra i formati differenti. - Check the colour matching between different sizes.
Vérifier l'assortiment des tonalités entre les différents formats. - Die Kombination der Farbtöne unter den verschiedenen Formaten prüfen.
Comprobar la combinación de los tonos entre los distintos formatos. - Проверьте сочетание тонов у разных форматов.

KARMAN

DECORI


Decors | Decors | Dekore | Decorados | Декоры

MOSAICO CEMENTO 3X3* Naturale R10


Tessera - Chip 2,8x2,8 - 1^{1/8}"x1^{1/8}"




30x30 - 11^{13/16}"x11^{13/16}"
EDPX Avorio ● A96



30x30 - 11^{13/16}"x11^{13/16}"
EDPY Sabbia ● A96



30x30 - 11^{13/16}"x11^{13/16}"
EDPZ Cenere ● A96



30x30 - 11^{13/16}"x11^{13/16}"
EDQ0 Antracite ● A96

LISTELLI SFALSATI CEMENTO* Naturale R10



30x60 - 11^{13/16}"x23^{5/8}"
EDQU Avorio ● A80



30x60 - 11^{13/16}"x23^{5/8}"
EDQV Sabbia ● A80



30x60 - 11^{13/16}"x23^{5/8}"
EDQW Cenere ● A80



30x60 - 11^{13/16}"x23^{5/8}"
EDQX Antracite ● A80

* Su rete in fibra - On fibre mesh backing - Sur filet en fibre de verre - Auf Glasfasernetz - Sobre malla de fibra - На волоконной сетке

KARMAN







PEZZI SPECIALI

Trims | Pieces Speciales | Formteile | Piezas Especiales | Специальные Изделия

	Dimensione Size	Avorio		Sabbia		Cenere		Antracite		Fascia di prezzo Price band
 Battiscopa - Skirting	Naturale R10 Rett. 7x60 - 2 ^{3/4} "x23 ^{5/8} " Pcs. Box. 15 - LM x Box 9,00	EDJ4		EDJ5		EDJ6		EDJ7		● A11
	Naturale R10 Rett. 4,6x90 - 1 ^{13/16} "x35 ^{7/16} " Pcs. Box. 8 - LM x Box 7,20	EDHX		-		EDHZ		-		● A18
 Gradino - Stair Tread	Naturale R10 Rett. 33x120 - 12 ^{15/16} "x47 ^{1/4} " Pcs. Box 2 - LM x Box 2,40	EDJ3		EDN8		EDN9		EDNA		● A82
 Gradone - Step	Naturale R10 Rett. 33x120x3,2x3,2 12 ^{15/16} "x47 ^{1/4} "x1 ^{1/4} "x1 ^{1/4} " Pcs. Box 2 - LM x Box 2,40	EDLM		EDLN		EDLP		EDLQ		● A98
 Angolare Dx Sx Corner Tile Right Left	Naturale R10 Rett. 33x120x3,2x3,2 12 ^{15/16} "x47 ^{1/4} "x1 ^{1/4} "x1 ^{1/4} " Pcs. Box 1 - LM x Box 1,20	Dx Right EDJ8	Sx Left EDJ9	Dx Right EDJA	Sx Left EDJC	Dx Right EDJD	Sx Left EDJE	Dx Right EDJF	Sx Left EDJG	● A104



Avorio Cemento Naturale R10 Rett.
60x120 - 23^{5/8}"x47^{1/4}"

CARATTERISTICHE TECNICHE	NORMA	VALORI
Technical Features - Caracteristiques Techniques - Technische Eigenschaften Technische Eigenschaften - Caracteristicas Tecnicas - Технические Характеристики	Standard - Norme Norm - Norma - Норма	Value - Valeur Vorgabe - Valor - Средние
 ASSORBIMENTO D'ACQUA Water absorption - Absorption d'eau - Wasseraufnahme Absorción de agua - Поглощение воды	UNI EN ISO 10545/3 ASTM C373	Conforme Compliant
 RESISTENZA ALLA FLESSIONE Modulus of rupture - Resistance a la flexion - Biegefestigkeit Resistencia a la flexion - Прочность на изгиб	UNI EN ISO 10545/4	≥ 45 N/mm ²
FORZA DI ROTTURA Breaking strength - Résistance à la rupture - Bruchlast Resistencia a la rotura - Разрывное усилие	UNI EN ISO 10545/4 ASTM C648	≥ 2000 N ≥ 400 lbf
 RESISTENZA AL GELO Frost resistance - Résistance au gel - Frostbeständigkeit Resistencia a las heladas - Морозостойкость	UNI EN ISO 10545/12 ASTM C1026	Conforme Unaffected
 RESISTENZA CHIMICA AD ALTE E BASSE CONCENTRAZIONI DI ACIDI E BASI Chemical resistance to high and low acid and basic concentrations Résistance chimique aux hautes et basses concentrations d'acides et de bases Chemikalienfestigkeit bei hohen und niedrigen Konzentrationen von Säuren und Basen Resistencia química con concentraciones altas y bajas de ácidos y bases Химическая стойкость к высоким и низким концентрациям кислот и щелочей	UNI EN ISO 10545/13 ASTM C-650	A - LA - HA Unaffected
 RESISTENZA ALLE MACCHIE Stain resistance - Résistance aux taches - Fleckenbeständigkeit Resistencia a las manchas - Стойкость к образованию пятен	UNI EN ISO 10545/14 ASTM C1378	5 Class A
 COEFFICIENTE DI ATTRITO Slip resistance Coefficient de glissement Rutschfestigkeit Barfußbereich Coeficiente de atrito medio Коэффициент трения	DIN EN 16165 Annex B DIN EN 16165 Annex A ANSI A326.3:2017 DCOF B.C.R.A. D.M. N. 236 14/6/89 AS 4586-2013 Anexo A BS 7976-2: 2002 BSEN13036-4:2011 Pendulum testers UNE 41901:2017 EX DB SUA (actual) -	R10 B (A+B) WET ≥ 0,50 > 0,40 P3 >36 Low Slip potential -

Per maggiori chiarimenti sui dati tecnici e sulla garanzia consultare il catalogo generale in vigore. - For further information on technical specifications, please consult our up-dated general catalogue. - Pour toutes informations supplémentaires sur les données techniques et les garanties, veuillez consulter le catalogue général en vigueur. - Für weitere Informationen über technische Daten und Garantiebeziehungen siehe bitte auf den aktuellen Gesamtkatalog. - Para ulteriores informaciones sobre los datos técnicos y la garantía, vease el catalogo general en vigor. - Более подробную информацию о технических данных и гарантии смотрите в действующем сводном катал.



PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS: UL GREENGUARD GOLD





放射性水平A类



15% 9,5 mm
valori medi - average values





SHADE VARIATION
V3 High

Formato Size Format Format Tamaño Формат cm	Spessore Thickness Epaisseur Stärke Espesor Толщина mm	Pz. x Mq. Pieces x Sqm Pcs / M ² Stk. x Qm Pzs x Mc. Шт x Кв.М.	Pz. x Scat. Pieces x Box Pcs / Bte Stk. x Krt. Pzs x Caja Шт x Кор.	Mq. x Scat. Sqm x Box M ² / Bte Qm x Krt. Mc. x Caja Кв.М. x Кор.	Peso x Scat. Weight x Box Poids / Bte Gewicht x Krt. Peso x Caja Вес x Кор. Kg	Scat. x Pal. Boxes x Pal. Bte / Pal. Krt. x Pal. Cajas x Pal. Кор. x Подд.	Mq. x Pal. Sqm x Pal. M ² / Pal. Qm x Pal. Mc. x Pal. Кв.М x Подд.	Peso x Pal. Weight x Pal. Poids / Pal. Gewicht x Pal. Peso x Pal. Вес x Подд. Kg
90x90 Naturale R10	9,5	1,23	2	1,620	35,64	24	38,88	855
60x120 Naturale R10	9,5	1,39	2	1,440	31,68	36	51,84	1140
60x60 Naturale R10	9,5	2,78	3	1,080	23,76	40	43,20	950
30x60 Naturale R10	9,5	5,56	6	1,080	23,76	48	51,84	1140
30x60 Listelli Sfalsati Naturale R10	9,5	5,56	4	0,720	15,80	30	21,60	474
30x30 Mosaico 3X3 Naturale R10	9,5	11,11	5	0,450	8,73	60	27,00	524

A Brand of Emileramica S.r.l. a socio unico



MEMBER



GREEN BUILDING COUNCIL
SOCIO
ITALIA



CONFINDUSTRIA
PER LA SOSTENIBILITÀ



CERTIFIED MANAGEMENT SYSTEMS
CQY
CERTIFICAZIONE

UNI EN ISO 9001:2015
UNI EN ISO 14001:2015
UNI ISO 45001:2018
UNI CEI EN ISO 80001:2018

I colori e le caratteristiche estetiche dei materiali illustrati nel presente catalogo sono da ritenersi puramente indicativi. Le misure dei prodotti qui indicate si intendono nominali e come i pesi ed i colori subiscono le variazioni tipiche del processo ceramico. Provenza si riserva la facoltà di modificare in qualunque momento senza preavviso le caratteristiche tecniche, estetiche e i materiali presentati. Tali caratteristiche non sono comunque vincolanti nei termini legali.

Colours and optical features of the materials illustrated in this catalogue are to be regarded as mere indications. Product sizes indicated are nominal and like weights and colours undergo the typical variations of the ceramic process. Provenza reserves the right to change the technical and optical features of the materials illustrated at any time and without notice. These features are not legally binding.



Provenza is a brand of Emilceramica S.r.l. a socio unico	Sede Commerciale/ Amministrativa
emilgroup.it/provenza emilgroup.it	Via Ghiarola Nuova, 29 - 41042 Fiorano Modenese (Mo) Italy T +39 0536 835111 - info@emilceramicagroup.it